

2-flute flattened end mills with straight shank, long neck and short cutting edge






Deep flattened slot

GM-2EP



● Suitable for narrow slot milling or milling of fine parts that could generate interference.

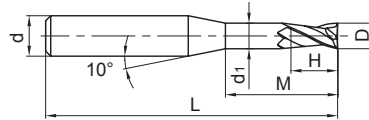

Type	Basic dimension(mm)						Number of teeth Z	Stock
	D	d	H	M	d ₁	L		
GM-2EP-D0.3-M02	0.3	4	0.4	2	0.25	50	2	●
GM-2EP-D0.3-M04	0.3	4	0.4	4	0.25	50	2	●
GM-2EP-D0.4-M02	0.4	4	0.6	2	0.35	50	2	●
GM-2EP-D0.4-M04	0.4	4	0.6	4	0.35	50	2	●
GM-2EP-D0.5-M04	0.5	4	0.7	4	0.45	50	2	●
GM-2EP-D0.5-M06	0.5	4	0.7	6	0.45	50	2	●
GM-2EP-D0.5-M08	0.5	4	0.7	8	0.45	50	2	●
GM-2EP-D0.6-M04	0.6	4	0.9	4	0.55	50	2	●
GM-2EP-D0.6-M06	0.6	4	0.9	6	0.55	50	2	●
GM-2EP-D0.7-M04	0.7	4	1.0	4	0.65	50	2	●
GM-2EP-D0.7-M06	0.7	4	1.0	6	0.65	50	2	●
GM-2EP-D0.7-M08	0.7	4	1.0	8	0.65	50	2	●
GM-2EP-D0.8-M04	0.8	4	1.2	4	0.75	50	2	●
GM-2EP-D0.8-M06	0.8	4	1.2	6	0.75	50	2	●
GM-2EP-D0.8-M08	0.8	4	1.2	8	0.75	50	2	●
GM-2EP-D0.8-M10	0.8	4	1.2	10	0.75	50	2	●
GM-2EP-D1.0-M04	1.0	4	1.5	4	0.95	50	2	●
GM-2EP-D1.0-M06	1.0	4	1.5	6	0.95	50	2	●
GM-2EP-D1.0-M08	1.0	4	1.5	8	0.95	50	2	●
GM-2EP-D1.0-M10	1.0	4	1.5	10	0.95	50	2	●
GM-2EP-D1.0-M12	1.0	4	1.5	12	0.95	50	2	●
GM-2EP-D1.0-M14	1.0	4	1.5	14	0.95	50	2	●
GM-2EP-D1.2-M06	1.2	4	1.8	6	1.15	50	2	●
GM-2EP-D1.2-M08	1.2	4	1.8	8	1.15	50	2	●
GM-2EP-D1.2-M10	1.2	4	1.8	10	1.15	50	2	●
GM-2EP-D1.2-M12	1.2	4	1.8	12	1.15	50	2	●
GM-2EP-D1.5-M06	1.5	4	2.3	6	1.45	50	2	●
GM-2EP-D1.5-M08	1.5	4	2.3	8	1.45	50	2	●

● Stock available ○ Make-to-order

Applicable workpiece material table ●Very suitable ○Suitable

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel、Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
○	○	○	○	○	○	○	○				

Code key **B258** Graphics category and identification **B259** Cutting parameters **B512-B513** Non-standard customization **B570-B571**

Indexable milling tools
Solid carbide end mills
GM series

GM series for general machining

2-flute flattened end mills with straight shank, long neck and short cutting edge






Deep flattened slot

GM-2EP



● Suitable for narrow slot milling or milling of fine parts that could generate interference.

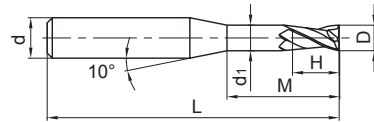

Indexable milling tools
Solid carbide end mills
GM series

Type	Basic dimension(mm)						Number of teeth Z	Stock
	D	d	H	M	d1	L		
GM-2EP-D1.5-M10	1.5	4	2.3	10	1.45	50	2	●
GM-2EP-D1.5-M12	1.5	4	2.3	12	1.45	50	2	●
GM-2EP-D1.5-M14	1.5	4	2.3	14	1.45	50	2	●
GM-2EP-D2.0-M06	2.0	4	3.0	6	1.95	50	2	●
GM-2EP-D2.0-M08	2.0	4	3.0	8	1.95	50	2	●
GM-2EP-D2.0-M10	2.0	4	3.0	10	1.95	50	2	●
GM-2EP-D2.0-M12	2.0	4	3.0	12	1.95	50	2	●
GM-2EP-D2.0-M14	2.0	4	3.0	14	1.95	50	2	●
GM-2EP-D2.0-M16	2.0	4	3.0	16	1.95	50	2	●
GM-2EP-D2.5-M08	2.5	4	3.7	8	2.4	50	2	●
GM-2EP-D2.5-M10	2.5	4	3.7	10	2.4	50	2	●
GM-2EP-D2.5-M12	2.5	4	3.7	12	2.4	50	2	●
GM-2EP-D2.5-M14	2.5	4	3.7	14	2.4	50	2	●
GM-2EP-D2.5-M16	2.5	4	3.7	16	2.4	60	2	●
GM-2EP-D2.5-M18	2.5	4	3.7	18	2.4	60	2	●
GM-2EP-D2.5-M20	2.5	4	3.7	20	2.4	60	2	●
GM-2EP-D3.0-M06	3.0	6	4.5	6	2.85	50	2	●
GM-2EP-D3.0-M08	3.0	6	4.5	8	2.85	50	2	●
GM-2EP-D3.0-M10	3.0	6	4.5	10	2.85	50	2	●
GM-2EP-D3.0-M12	3.0	6	4.5	12	2.85	50	2	●
GM-2EP-D3.0-M14	3.0	6	4.5	14	2.85	60	2	●
GM-2EP-D3.0-M16	3.0	6	4.5	16	2.85	60	2	●
GM-2EP-D3.0-M18	3.0	6	4.5	18	2.85	60	2	●
GM-2EP-D3.0-M20	3.0	6	4.5	20	2.85	60	2	●
GM-2EP-D4.0-M12	4.0	6	6.0	12	3.85	50	2	●
GM-2EP-D4.0-M16	4.0	6	6.0	16	3.85	60	2	●
GM-2EP-D4.0-M20	4.0	6	6.0	20	3.85	60	2	●
GM-2EP-D4.0-M25	4.0	6	6.0	25	3.85	60	2	●
GM-2EP-D5.0-M16	5.0	6	7.5	16	4.85	60	2	●
GM-2EP-D5.0-M25	5.0	6	7.5	25	4.85	70	2	●

➤ Applicable workpiece material table ● Very suitable ○ Suitable

● Stock available ○ Make-to-order

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel, Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
○	○	○	○	○	○	○	○				

Code key

B258

Graphics category and identification

B259

Cutting parameters

B512-B513

Non-standard customization

B570-B571