

NM series for copper machining




Outstanding NM milling series, let copper&alloys of copper machining wonderful!

- With super sharp edge, most suitable for high precision machining of copper & alloy of copper.
- With CrN coating which own good lubricating property and small friction coefficient, can realize light cutting processing circle, long tool life and high quality machined surface.

Coat	Hardness(HV)	Fiction coefficient	Oxidizing temperature(C°)	Strengthness combined with substrate
CrN	1800	0.25	700	⊙
TiN	2200	0.4	500	⊙
TiCN	2700	0.3	400	○
TiAlN	2800	0.3	800	⊙

⊙ Excellent ○ Normal

Tool: NM-2B-R3.0
 Dimension: R3.0mm
 workpiece material: C1100
 Rotating speed: 8000r/min (150m/min)
 Feed speed: 1200mm/min (0.15mm/r)
 Axial cutting depth: $a_p=0.3\text{mm}$
 Radial cutting depth: $a_e=0.6\text{mm}$
 Cutting style: face milling(down milling) Cooling system: air cooling
 Machine: MIKRON UCP 1000

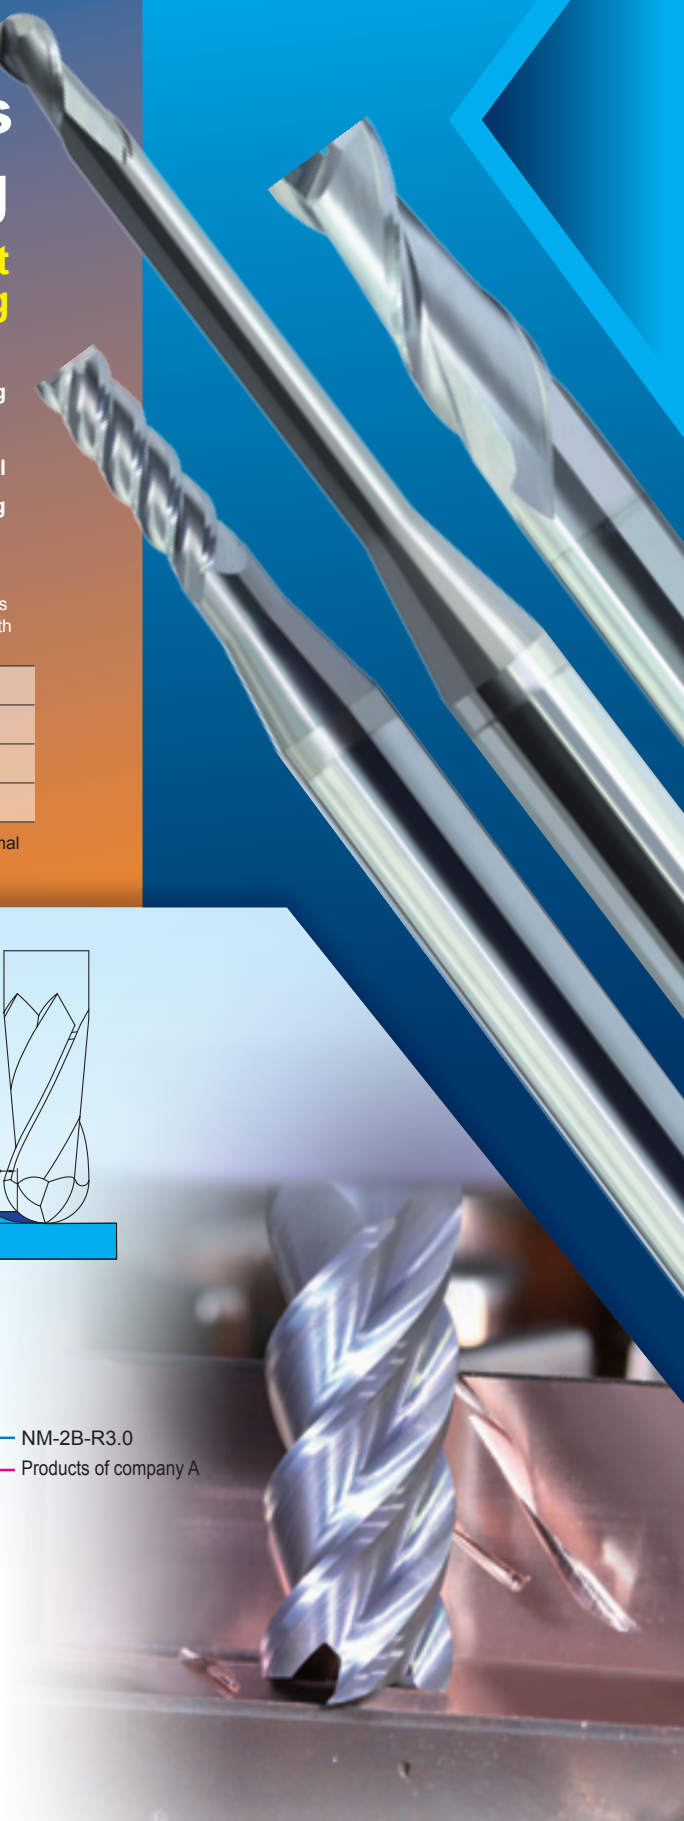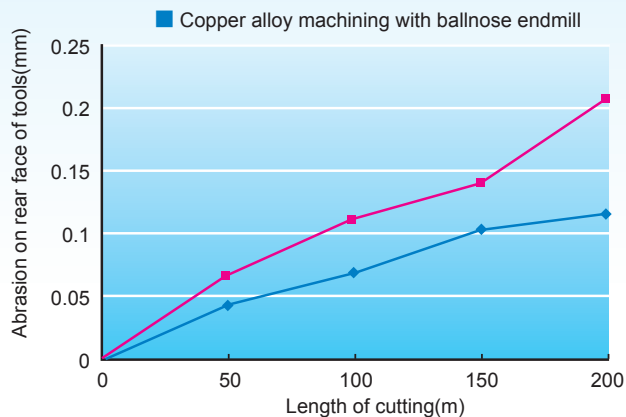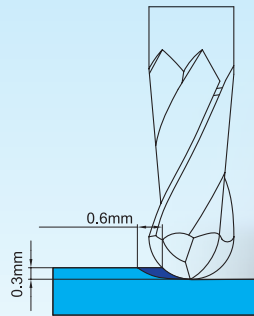


2-flute flattened end mills with straight shank



NM-2E



- Very suitable for slotting.
- Sharp edge, can realize high quality surface.

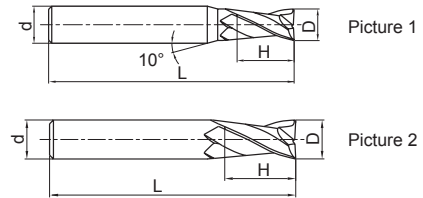

Type	Basic dimension(mm)				Number of teeth Z	Geometry	Stock
	D	d	H	L			
NM-2E-D1.0	1.0	4	3	50	2	Picture 1	○
NM-2E-D2.0	2.0	4	6	50	2	Picture 1	○
NM-2E-D3.0	3.0	6	8	50	2	Picture 1	○
NM-2E-D4.0	4.0	6	11	50	2	Picture 1	○
NM-2E-D5.0	5.0	6	13	50	2	Picture 1	○
NM-2E-D6.0	6.0	6	16	50	2	Picture 2	○
NM-2E-D8.0	8.0	8	20	60	2	Picture 2	○
NM-2E-D10.0	10.0	10	25	75	2	Picture 2	○
NM-2E-D12.0	12.0	12	30	75	2	Picture 2	○

● Stock available ○ Make-to-order

Indexable milling tools
Solid carbide end mills
NM series

▶ Applicable workpiece material table ○ Very suitable ○ Suitable

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel, Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
								○	○		



NM series for copper machining



4-flute flattened end mills with straight shank



NM-4E



- Very suitable for slotting.
- Sharp edge, can realize high quality surface.



Type	Basic dimension(mm)				Number of teeth Z	Geometry	Stock
	D	d	H	L			
NM-4E-D3.0	3.0	6	8	50	4	Picture 1	○
NM-4E-D4.0	4.0	6	11	50	4	Picture 1	○
NM-4E-D5.0	5.0	6	13	50	4	Picture 1	○
NM-4E-D6.0	6.0	6	16	50	4	Picture 2	○
NM-4E-D8.0	8.0	8	20	60	4	Picture 2	○
NM-4E-D10.0	10.0	10	25	75	4	Picture 2	○
NM-4E-D12.0	12.0	12	30	75	4	Picture 2	○

● Stock available ○ Make-to-order

Indexable milling tools

Solid carbide end mills

NM series

▶▶ Applicable workpiece material table ● Very suitable ○ Suitable

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel、Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
							●	○			

Code key **B258** Graphics category and identification **B259** Cutting parameters **B545** Non-standard customization **B570-B571**



2-flute flattened end mills with straight shank, long neck and short cutting edge



NM-2EP



- Suitable for profile milling.
- Workpiece surface is excellent after machining.

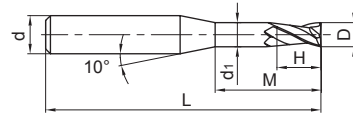

Type	Basic dimension(mm)						Number of teeth Z	Stock
	D	d	H	M	d ₁	L		
NM-2EP-D0.5-M04	0.5	4	0.7	4	0.45	50	2	○
NM-2EP-D0.5-M06	0.5	4	0.7	6	0.45	50	2	○
NM-2EP-D0.5-M08	0.5	4	0.7	8	0.45	50	2	○
NM-2EP-D0.8-M04	0.8	4	1.2	4	0.75	50	2	○
NM-2EP-D0.8-M06	0.8	4	1.2	6	0.75	50	2	○
NM-2EP-D0.8-M08	0.8	4	1.2	8	0.75	50	2	○
NM-2EP-D0.8-M10	0.8	4	1.2	10	0.75	50	2	○
NM-2EP-D1.0-M04	1.0	4	1.5	4	0.95	50	2	○
NM-2EP-D1.0-M06	1.0	4	1.5	6	0.95	50	2	○
NM-2EP-D1.0-M08	1.0	4	1.5	8	0.95	50	2	○
NM-2EP-D1.0-M10	1.0	4	1.5	10	0.95	50	2	○
NM-2EP-D1.0-M12	1.0	4	1.5	12	0.95	50	2	○
NM-2EP-D1.0-M14	1.0	4	1.5	14	0.95	50	2	○
NM-2EP-D1.5-M08	1.5	4	2.3	8	1.45	50	2	○
NM-2EP-D1.5-M16	1.5	4	2.3	16	1.45	50	2	○
NM-2EP-D2.0-M06	2.0	4	3.0	6	1.95	50	2	○
NM-2EP-D2.0-M08	2.0	4	3.0	8	1.95	50	2	○
NM-2EP-D2.0-M10	2.0	4	3.0	10	1.95	50	2	○
NM-2EP-D2.0-M12	2.0	4	3.0	12	1.95	50	2	○
NM-2EP-D2.0-M14	2.0	4	3.0	14	1.95	50	2	○
NM-2EP-D2.0-M16	2.0	4	3.0	16	1.95	50	2	○
NM-2EP-D2.5-M10	2.5	4	3.7	10	2.4	50	2	○
NM-2EP-D2.5-M20	2.5	4	3.7	20	2.4	60	2	○
NM-2EP-D3.0-M10	3.0	6	4.5	10	2.85	50	2	○
NM-2EP-D3.0-M20	3.0	6	4.5	20	2.85	60	2	○
NM-2EP-D4.0-M16	4.0	6	6.0	16	3.85	60	2	○
NM-2EP-D4.0-M25	4.0	6	6.0	25	3.85	60	2	○
NM-2EP-D5.0-M16	5.0	6	7.5	16	4.85	60	2	○
NM-2EP-D5.0-M25	5.0	6	7.5	25	4.85	70	2	○

▶ Applicable workpiece material table ● Very suitable ○ Suitable ● Stock available ○ Make-to-order

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel, Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
								●	○		

Code key B258 Graphics category and identification B259 Cutting parameters B546 Non-standard customization B570-B571

Indexable milling tools
Solid carbide end mills
NM series

NM series for copper machining





2-flute ball nose end mills with straight shank




NM-2B



- Suitable for profile milling.
- Workpiece surface is excellent after machining.

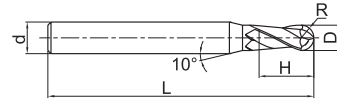

Picture 1

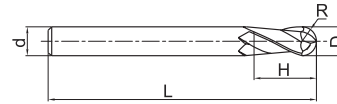

Picture 2

Type	Basic dimension(mm)					Number of teeth Z	Geometry	Stock
	D	R	d	H	L			
NM-2B-R0.5	1.0	0.5	4	2	50	2	Picture 1	○
NM-2B-R0.75	1.5	0.75	4	3	50	2	Picture 1	○
NM-2B-R1.0	2.0	1.0	4	4	50	2	Picture 1	○
NM-2B-R1.25	2.5	1.25	4	5	50	2	Picture 1	○
NM-2B-R1.5	3.0	1.5	6	6	50	2	Picture 1	○
NM-2B-R1.75	3.5	1.75	6	8	50	2	Picture 1	○
NM-2B-R2.0	4.0	2.0	6	8	50	2	Picture 1	○
NM-2B-R2.5	5.0	2.5	6	10	50	2	Picture 1	○
NM-2B-R3.0	6.0	3.0	6	12	50	2	Picture 2	○
NM-2B-R4.0	8.0	4.0	8	16	60	2	Picture 2	○
NM-2B-R5.0	10.0	5.0	10	20	75	2	Picture 2	○
NM-2B-R6.0	12.0	6.0	12	24	75	2	Picture 2	○

● Stock available ○ Make-to-order

Indexable milling tools

Solid carbide end mills

NM series

▶▶ Applicable workpiece material table ○ Very suitable ○ Suitable

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel、Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
							○	○			

Code key

B258

Graphics category and identification

B259

Cutting parameters

B547


Non-standard customization

B570-B571




2-flute ball nose end mills with straight shank, long neck and short cutting edge



NM-2BP

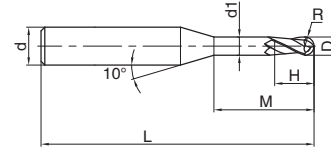

Very suitable for copper electrode three dimensional machining.



Type	Basic dimension(mm)							Number of teeth Z	Stock
	D	R	H	d1	M	d	L		
NM-2BP-R0.25-M04	0.5	0.25	0.7	0.45	4	4	50	2	○
NM-2BP-R0.25-M06	0.5	0.25	0.7	0.45	6	4	50	2	○
NM-2BP-R0.3-M04	0.6	0.3	0.9	0.55	4	4	50	2	○
NM-2BP-R0.3-M06	0.6	0.3	0.9	0.55	6	4	50	2	○
NM-2BP-R0.3-M08	0.6	0.3	0.9	0.55	8	4	50	2	○
NM-2BP-R0.4-M04	0.8	0.4	1.2	0.75	4	4	50	2	○
NM-2BP-R0.4-M06	0.8	0.4	1.2	0.75	6	4	50	2	○
NM-2BP-R0.4-M08	0.8	0.4	1.2	0.75	8	4	50	2	○
NM-2BP-R0.4-M10	0.8	0.4	1.2	0.75	10	4	50	2	○
NM-2BP-R0.5-M04	1.0	0.5	1.5	0.95	4	4	50	2	○
NM-2BP-R0.5-M06	1.0	0.5	1.5	0.95	6	4	50	2	○
NM-2BP-R0.5-M08	1.0	0.5	1.5	0.95	8	4	50	2	○
NM-2BP-R0.5-M10	1.0	0.5	1.5	0.95	10	4	50	2	○
NM-2BP-R0.5-M12	1.0	0.5	1.5	0.95	12	4	50	2	○
NM-2BP-R0.75-M08	1.5	0.75	2.3	1.45	8	4	50	2	○
NM-2BP-R0.75-M16	1.5	0.75	2.3	1.45	16	4	50	2	○
NM-2BP-R1.0-M06	2.0	1.0	3.0	1.95	6	4	50	2	○
NM-2BP-R1.0-M08	2.0	1.0	3.0	1.95	8	4	50	2	○
NM-2BP-R1.0-M10	2.0	1.0	3.0	1.95	10	4	50	2	○
NM-2BP-R1.0-M12	2.0	1.0	3.0	1.95	12	4	50	2	○
NM-2BP-R1.0-M16	2.0	1.0	3.0	1.95	16	4	50	2	○
NM-2BP-R1.0-M20	2.0	1.0	3.0	1.95	20	4	60	2	○
NM-2BP-R1.5-M10	3.0	1.5	4.5	2.85	10	6	50	2	○
NM-2BP-R1.5-M20	3.0	1.5	4.5	2.85	20	6	60	2	○
NM-2BP-R2.0-M10	4.0	2.0	6.0	3.85	10	6	60	2	○
NM-2BP-R2.0-M16	4.0	2.0	6.0	3.85	16	6	60	2	○
NM-2BP-R2.0-M20	4.0	2.0	6.0	3.85	20	6	60	2	○
NM-2BP-R2.0-M25	4.0	2.0	6.0	3.85	25	6	60	2	○
NM-2BP-R2.5-M16	5.0	2.5	7.5	4.85	16	6	60	2	○
NM-2BP-R2.5-M25	5.0	2.5	7.5	4.85	25	6	70	2	○

● Stock available ○ Make-to-order

Applicable workpiece material table ○ Very suitable ○ Suitable

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel, Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
								○	○		

Code key B258 Graphics category and identification B259 Cutting parameters B548 Non-standard customization B570-B571

Indexable milling tools
Solid carbide end mills
NM series